




EQUOIA BRASS & COPPER

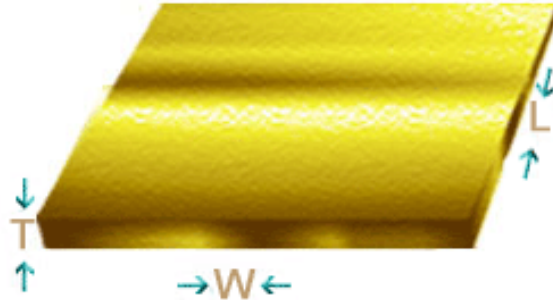

ALLOY 260 BRASS SHEET
ASTM B36

Thickness (inches)	Width (inches)	Length (inches)	Pounds/Sq Foot	Pounds/Sheet
0.016	36	96	0.710	17.03
0.018	36	96	0.799	19.16
0.020	36	96	0.892	21.39*
0.025	36	96	1.122	26.92*
0.032	36	96	1.419	34.05*
0.040	24	96	1.787	28.59*
0.040	36	96	1.787	42.88*
0.050	24	96	2.253	36.05*
0.050	36	96	2.253	54.07*
0.064	24	96	2.843	45.49**
0.064	36	96	2.843	68.23*
0.072	36	96	3.193	76.63
0.080	36	96	3.584	86.01
0.093	24	96	4.023	64.37**
0.093	36	96	4.023	96.55**

Thickness (inches)	Width (inches)	Length (inches)	Pounds/Sq Foot	Pounds/Sheet
0.125	24	96	5.544	88.70**
0.125	36	96	5.544	133.05**
0.125	48	96	5.544	177.41***
0.188	24	96	8.316	133.05**
0.188	36	96	8.316	199.58**
0.188	48	96	8.316	266.11***
0.250	24	96	11.090	177.44**
0.250	36	96	11.090	266.16**
0.250	48	96	11.090	354.88***
0.375	36	96	16.630	399.12**
0.500	36	96	22.180	532.32**
0.750	24	96	33.050	528.80**
1.000	24	96	44.000	704.00**

* Also stocked in soft temper

** Also stocked in CDA 353/356 leaded alloy

*** Stocked in CDA 280 Muntz metal Brass sheets are available in CDA 220 (commercial bronze) and CDA 230 (rich low brass) Precision slitting to any width. All tempers and alloys available.

Sequoia Brass and Copper
2353 Industrial Parkway
West Hayward, CA 94545
www.Sequoia-Brass-Copper.com

Call us at 510-887-5525
or Toll Free at 1-800-362-5255
Fax us at 510-887-0601