




# EQUOIA BRASS & COPPER

12 Foot Lengths

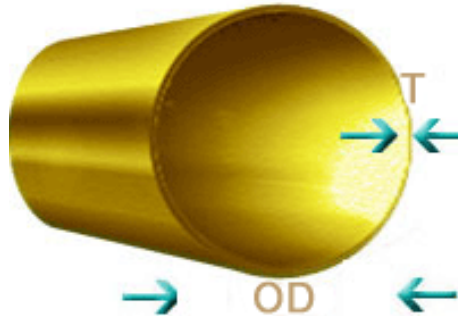

ALLOYS 260/272/274/330/335 BRASS TUBE  
**Approx. Pounds Per Foot**

| * Inches | Wall Thickness (T) |       |       |       |       |       |       |       |       |       |       |       |       |
|----------|--------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| (OD)     | 0.016              | 0.020 | 0.025 | 0.028 | 0.032 | 0.035 | 0.040 | 0.050 | 0.058 | 0.062 | 0.065 | 0.125 | 0.250 |
| 1/8      | 0.020              | 0.024 | 0.029 |       | 0.034 |       |       |       |       |       |       |       |       |
| 5/32     | 0.026              |       |       | 0.038 | 0.046 |       |       |       |       |       |       |       |       |
| 3/16     | 0.032              | 0.039 | 0.047 |       | 0.058 |       |       |       |       |       |       |       |       |
| 1/4      | 0.041              | 0.053 | 0.065 | 0.072 | 0.081 |       | 0.099 | 0.114 |       | 0.136 | 0.139 |       |       |
| 5/16     |                    | 0.068 | 0.083 |       | 0.104 |       | 0.126 | 0.155 |       | 0.181 | 0.186 |       |       |
| 3/8      | 0.063              | 0.082 | 0.101 |       | 0.127 | 0.138 | 0.162 | 0.188 | 0.213 | 0.226 | 0.233 | 0.362 |       |
| 7/16     |                    | 0.097 | 0.119 |       | 0.150 |       |       | 0.224 |       | 0.271 | 0.280 |       |       |
| 1/2      | 0.090              | 0.111 | 0.137 |       | 0.173 |       | 0.213 | 0.260 | 0.297 | 0.316 | 0.327 | 0.543 |       |
| 9/16     |                    | 0.126 |       |       | 0.197 |       | 0.252 |       |       |       |       |       |       |
| 5/8      | 0.110              | 0.140 | 0.174 |       | 0.220 |       | 0.271 | 0.333 | 0.381 | 0.407 | 0.421 | 0.723 |       |
| 11/16    |                    | 0.155 |       | 0.214 | 0.243 |       |       |       |       |       | 0.470 |       |       |
| 3/4      | 0.135              | 0.169 | 0.210 |       | 0.266 | 0.290 | 0.329 | 0.405 | 0.464 | 0.497 | 0.515 | 0.904 |       |
| 13/16    |                    | 0.183 | 0.229 |       |       |       |       |       |       | 0.543 | 0.562 |       |       |
| 7/8      | 0.158              | 0.198 | 0.246 | 0.278 | 0.312 |       | 0.387 | 0.477 |       | 0.588 | 0.609 | 1.09  |       |
| 15/16    |                    | 0.212 |       |       | 0.335 |       |       |       |       | 0.657 |       | 1.20  |       |
| 1        | 0.182              | 0.227 | 0.282 | 0.315 | 0.359 | 0.391 | 0.444 | 0.550 |       | 0.678 | 0.703 | 1.27* |       |
| 1 1/8    |                    | 0.256 | 0.318 |       | 0.404 |       | 0.502 | 0.622 | 0.710 | 0.772 | 0.797 | 1.45  |       |

**Page 2**  
**ALLOYS 260/272/274/330/335 BRASS TUBE**  
**Approx. Pounds Per Foot**

| * Inches  | Wall Thickness (T) |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------|--------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| (OD)      | 0.016              | 0.020 | 0.025 | 0.028 | 0.032 | 0.035 | 0.040 | 0.050 | 0.058 | 0.062 | 0.065 | 0.125 | 0.250 |
| 1<br>3/16 |                    |       | 0.336 |       | 0.428 |       |       |       |       |       |       | 1.57  |       |
| 1<br>1/4  | 0.226              | 0.285 | 0.354 | 0.396 | 0.451 | 0.492 | 0.560 | 0.694 |       | 0.859 | 0.891 | 1.63  |       |
| 1<br>5/16 |                    |       |       |       | 0.474 |       |       |       |       |       |       |       |       |
| 1<br>3/8  |                    | 0.314 | 0.391 |       | 0.497 |       | 0.648 | 0.752 |       | 0.949 | 0.985 | 1.81  |       |
| 1<br>1/2  |                    | 0.343 | 0.427 | 0.477 | 0.544 | 0.593 | 0.676 | 0.839 |       | 1.04  | 1.08  | 1.99* | 3.98  |
| 1<br>5/8  |                    |       | 0.463 |       | 0.590 |       | 0.734 | 0.823 |       | 1.13  | 1.17  | 2.17  |       |
| 1<br>3/4  |                    |       | 0.499 |       | 0.636 |       | 0.992 | 1.00  |       | 1.22  | 1.27  | 2.35  | 4.70  |
| 1<br>7/8  |                    |       |       |       | 0.683 |       |       |       |       | 1.31  | 1.36  | 2.53  |       |
| 2         |                    |       | 0.571 | 0.638 | 0.729 | 0.796 | 0.907 | 1.13  | 1.30  | 1.40  | 1.46  | 2.71* | 5.06  |
| 2<br>1/4  |                    |       | 0.644 |       | 0.821 |       | 1.02  | 1.29  |       | 1.58  | 1.64  | 3.07  |       |
| 2<br>3/8  |                    |       |       |       |       |       | 1.11  |       |       |       | 1.74  |       |       |
| 2<br>1/2  |                    |       |       |       | 0.914 | 0.999 | 1.14  | 1.42  |       | 1.76  | 1.83  | 3.44* | 6.51  |
| 2<br>3/4  |                    |       |       |       | 1.01  |       |       |       |       | 1.94  | 2.02  | 3.80  |       |
| 3         |                    |       |       |       | 1.10  | 1.20  |       | 1.71  |       | 2.12  | 2.21  | 4.16* | 7.96  |
| 3<br>1/4  |                    |       |       |       |       |       |       |       |       | 2.31  | 2.40  | 4.52  |       |
| 3<br>1/2  |                    |       |       |       | 1.28  |       |       |       |       | 2.49  | 2.58  | 4.88  | 9.40  |
| 3<br>3/4  |                    |       |       |       |       |       |       |       |       | 2.67  | 2.77  | 5.24  |       |
| 4         |                    |       |       |       |       | 1.61  |       |       |       | 2.85  | 2.96  | 5.61  | 10.90 |
| 4 1/4     |                    |       |       |       |       |       |       |       |       | 3.03  | 3.15  | 5.97  |       |
| 4<br>1/2  |                    |       |       |       |       |       |       |       |       | 3.21  | 3.34  | 6.33  |       |
| 5         |                    |       |       |       |       |       |       |       |       | 3.71  | 7.05  |       |       |
| 6         |                    |       |       |       |       |       |       |       |       | 4.46  | 8.49  |       |       |
| 8         |                    |       |       |       |       |       |       |       |       |       | 12.20 |       |       |

OD \* = Outer Diameter Inches

\* available in Alloy 385

Sequoia Brass and Copper  
2353 Industrial Parkway  
West Hayward, CA 94545  
[www.Sequoia-Brass-Copper.com](http://www.Sequoia-Brass-Copper.com)

Call us at 510-887-5525  
or Toll Free at 1-800-362-5255  
Fax us at 510-887-0601